

Mini Pragma

Surface mounting enclosures

Offer: with earth + neutral terminal block


Mini Pragma is a robust modular enclosure (IK 07), aesthetic with innovative design; it is highly suitable for a living environment integration. It offers great security (IP 40, IP 41, with accessory) thanks to the front face with a white opaque or transparent door models on all models.

The surface mounting enclosures

The range consists of enclosures with a width of 4, 6, 8, 12, 18, 24 or 36- module of 18 mm, of 1, 2 or 3-row ready-to-use; designed for electricians: ergonomic design and flexibility of installation.

Easy installation and large cabling space

The chassis shapes are rounded and are not wounding for the cable and finger.

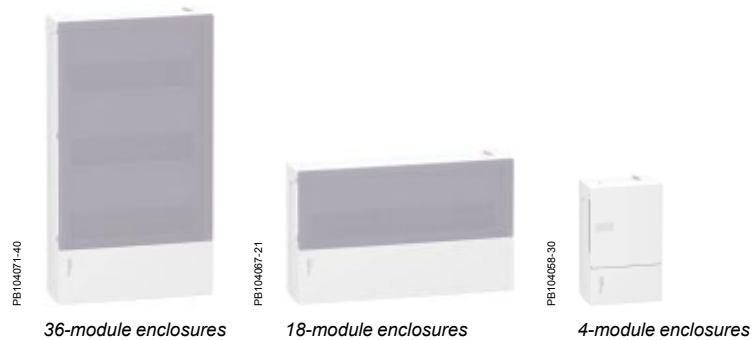

PB104675-90

Entry by cable, tube or trunking

Insulating edge

DIN rails

- 1 to 3 DIN rails fixed asymmetrically

Large space for cabling

Removable cable entry plates

- Located at the top and bottom of the enclosure, they offer wide access and allow easy association

Fixation

- The back fitting with oblong holes is sturdy and allows vertical adjustment

Earth and neutral terminal block

- Clipped with quick connection

PB104632-90

A white opaque or transparent door

- Reversible opens to 140°, after which it can be removed, without breaking

Removable front face

- With insulating screen

Options

- Marker light: ensures that the electrical functions can be accessed in the event of a general power supply failure: the enclosure remains illuminated and can therefore easily be accessed to allow the electrical installation to be restored to normal operation
- Phase terminal block
- Kit IP 41
- Keylock

Blanking plates

Entry by cable, tube or trunking

Mini Pragma

Surface mounting enclosures

Offer: with earth + neutral terminal block

A range of 18 mm, 1, 2 or 3-row 4, 6, 8, 12, 18, 24 or 36-module ready-to-use enclosures designed for electricians: ergonomic design and flexibility of installation.

Function


This distribution or sub-distribution enclosure, up to 63 A, is designed for installing electrical switchboards in new or renovated installations in the housing sector.

Description


The surface mounting Mini Pragma consists of:

- a back with:
 - a centered slot to facilitate installation
 - fixing holes for vertical adjustment.
 - the necessitate for entry cables:
 - two removable cable entry plates at the top and bottom
 - punch-outs
 - a large area for drilling (crown saw, punches)
 - 1 to 3 DIN rails fixed asymmetrically onto the back
 - a reversible front face, fitted with pre-cutout blanking plates
 - a white opaque or transparent door.
 - an earth terminal block and a neutral terminal block
- Enclosure colour: White RAL 9003.

This enclosure can be equipped with a marker light, available in accessories. It allows locating the enclosure in the dark during a power failure.

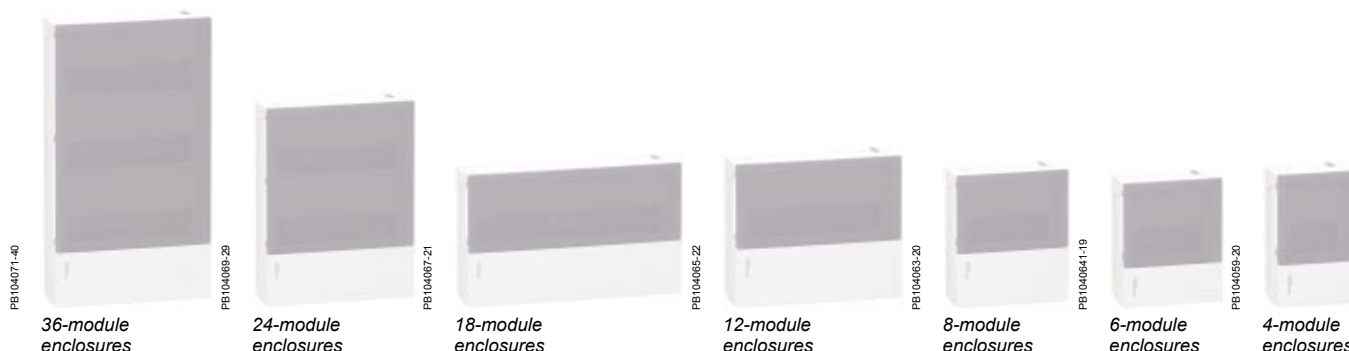

Smoked transparent door.



White door.

Technical data

Enclosures

Compliance with standards		IEC 60439-3, IEC 60529, IEC 60695-2-11, EN 50102, IEC 60670-24
Rated current (In)	4-module enclosure	50 A
	6 to 36-module enclosures	63 A
Rated insulation voltage (Ui)		< 400 V
Insulation		Class 2 (to IEC 60439-3)
Degree of protection	To IEC 60529	IP 40
	Against mechanical impacts	IK 07
Materials		Self-extinguishing technoplastic (1): resistant to fire and abnormal heat 650°C to IEC 60695-2-11

(1) Technoplastic material specially developed by Schneider Electric.

Mini Pragma

Surface mounting enclosures

Offer: with earth + neutral terminal block

PB104089-35



MIP10104T

PB104650-30



Bouchon isolant

PB104657-37



MIP99030

PB104637-45



MIP99034

Catalogue numbers

White enclosures				Cat. no.	
Number of rows	Number of modules per row	Capacity in 18 mm modules	Rated current In (A)	With solid white door	With smoked transparent door
1	4	4	50	MIP12104	MIP12104T
	6	6	63	MIP12106	MIP12106T
	8	8	63	MIP12108	MIP12108T
	12	12	63	MIP12112	MIP12112T
	18	18	63	MIP12118	MIP12118T
2	12	24	63	MIP12212	MIP12212T
3	12	36	63	MIP12312	MIP12312T

Components delivered with each enclosure

Type	
Insulating plug (pack of 4)	To be placed over the back fixing screws to obtain class 2 insulation
Identification strip for each row	To be glued onto the front panel
Two terminal block supports	
Two earth/neutral terminal blocks	Supplied with the 4 or 6-module enclosure 2 x (1 x 16 [□] + 2 x 10 [□] + 1 x 6 [□])
	Supplied with the 8 or 12-module enclosure 2 x (1 x 16 [□] + 4 x 10 [□] + 3 x 6 [□])
	Supplied with the 18 or 24-module enclosure 2 x (2 x 16 [□] + 8 x 10 [□] + 6 x 6 [□])
	Supplied with the 36-module enclosure 2 x (2 x 16 [□] + 9 x 10 [□] + 9 x 6 [□])
Blanking plates (packs of 10)	Clipped on the front face

Accessories

Type	Cat. no.
Removable plate (pack of 2)	4 modules MIP99029
	6 modules MIP99030
	8 modules MIP99031
	12 modules MIP99032
	18 modules MIP99033
Surface mounting IP41 kit	MIP99034
Terminal block support (pack of 2)	MIP99036
Terminal block	1 x 16 [□] + 2 x 10 [□] + 1 x 6 [□] MIP99037
	1 x 16 [□] + 4 x 10 [□] + 3 x 6 [□] MIP99038
	2 x 16 [□] + 8 x 10 [□] + 6 x 6 [□] MIP99039
	2 x 16 [□] + 9 x 10 [□] + 9 x 6 [□] MIP99040
Earth terminal block	3 x 16 [□] + 12 x 2.5 [□] 13409
	4 x 16 [□] + 20 x 2.5 [□] 13410
Ph+N insulated terminal block (pack of 2)	2 x (1 x 35 [□] + 5 x 16 [□]) 13411
	2 x (1 x 35 [□] + 7 x 16 [□]) 13412
Blanking plate	5 modules 13387
Symbol plate	Standard 13735
	Special 13736
Keylock	MIP99046
Marker light	MIP99050

Mini Pragma

Surface mounting enclosures

Accessories for enclosures

Connection accessories			Cat. no.
Type		Description	
Terminal block support (pack of 2)	18 modules	The terminal block support can be clipped directly onto the back at the top and bottom of the enclosure. It clips immediately into place. Moreover, an audible «click» ensures that it is in the correct position. It is sufficiently clear of the back not to impede the cable routing and to ensure easy connection. It provides: ■ a viewing angle ensuring that the cable is securely in place ■ a screwing angle ensuring that the screws are tight	MIP99036
Terminal block	1 x 16 □ + 2 x 10 □ + 1 x 6 □	Simplifies electrical connection ■ Installation: □ clips onto the terminal block support ■ Consists of: □ captive screws supplied open □ guides making it easier to insert cables into the tunnels	MIP99037
	1 x 16 □ + 4 x 10 □ + 3 x 6 □		MIP99038
	2 x 16 □ + 8 x 10 □ + 6 x 6 □		MIP99039
	2 x 16 □ + 9 x 10 □ + 9 x 6 □		MIP99040
Earth terminal block	3 x 16 □ + 12 x 2.5 □	With screws and tool-free connection	13409
	4 x 16 □ + 20 x 2.5 □		13410
Ph+N insulated terminal block (pack of 2)	2 x (1 x 35 □ + 5 x 16 □)	Insulated up to 80 A	13411
	2 x (1 x 35 □ + 7 x 16 □)		13412
Installation accessories			Cat. no.
Kit IP41		White sealing kit	MIP99034

Mini Pragma

Surface mounting enclosures

Accessories for enclosures (continued)


Finishing accessories		Cat. no.
Type	Description	Solid white
PB104113-20 	2 white removable plates	
	4 modules	MIP99029
	6 modules	MIP99030
	8 modules	MIP99031
	12 modules	MIP99032
	18 modules	MIP99033
PB104125-20 	Blanking plate	
	Used to cover empty slots	13387
	■ 5 dividable modules ■ Colour: white RAL 9003 ■ Supplied in packs of 10	
E45102-23 	Symbol plate	
	Standard	13735
	Special	13736
PB104126-15 	Keylock	
	Used to protect access to the switchgear control in certain establishments, according to the regulations	MIP99046
	■ Supplied with two metal keys ■ Fixed to the enclosure and the door after punch-out according to instructions	
PB104673-20 	Marker light	
	Is illuminated when the terminal block voltage of the light is 0 V. It has a continuous supercapacitor power supply that needs no battery, accumulator or maintenance	MIP99050
	■ White LED ■ Autonomy: 20 mn ■ Light output: 5 lumens ■ Supply voltage: 240 V AC max ■ Recharge duration: 6 h ■ Service life: 15 years ■ Degree of protection: IP40, IK07 ■ Insulation class: 2 ■ Connection: 2,5 mm² max ■ Withstand to fire and abnormal heat: 750°C	

Mini Pragma


Surface mounting enclosures

DB122738


Front view




4, 6 modules

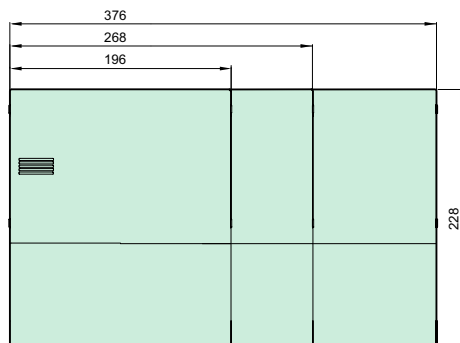

8, 12, 18 modules

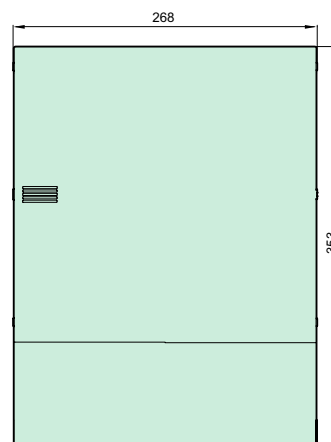


24 modules

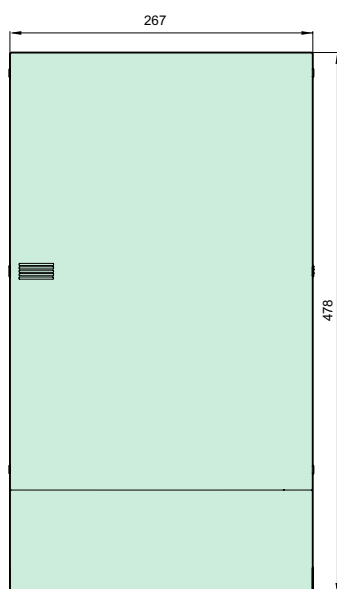


36 modules


Side view




4, 6 modules



8, 12, 18 modules

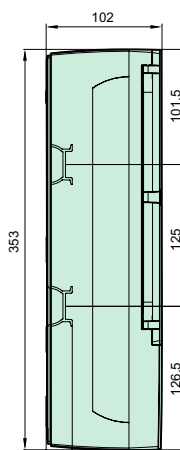

24 modules

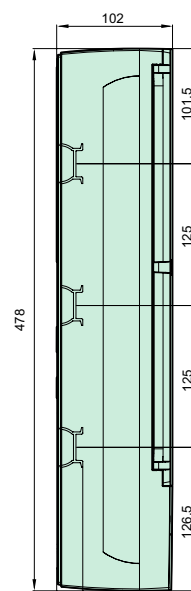


36 modules

Mini Pragma


Surface mounting enclosures

DB122739


Inside view




4 modules




6 modules




8 modules




12 modules

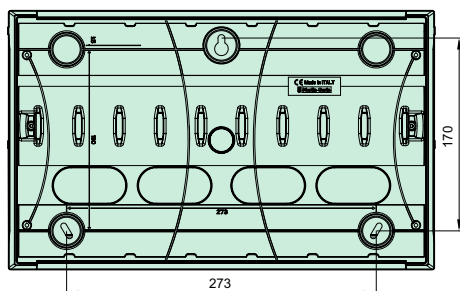

18 modules

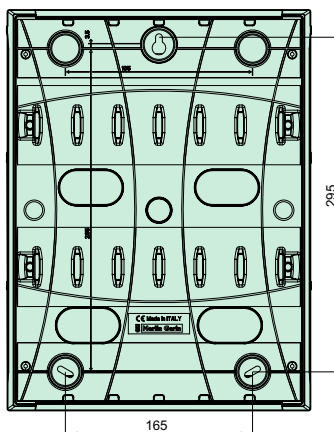

24 modules

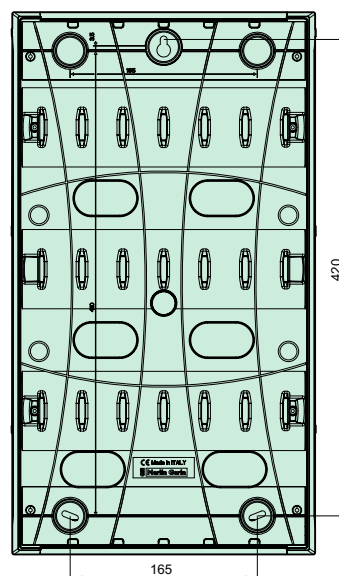

36 modules

Mini Pragma

Flush mounting enclosures

Offer: with earth + neutral terminal block

Mini Pragma is a robust modular enclosure (IK 07), aesthetic with innovative design; it is highly suitable for a living environment integration. It offers great security (IP 40, IP 41, with accessory) thanks to the front face with a white opaque or transparent door models on all models.

The flush mounting enclosures

The range consists of enclosures with a width of 4, 6, 8, 12, 18, 24 or 36- module of 18 mm, of 1, 2 or 3-row ready-to-use; designed for electricians: ergonomic design and flexibility of installation.

Easy installation and large cabling space

The chassis shapes are rounded and are not wounding for the cable and finger.



36-module enclosures



18-module enclosures



4-module enclosures

PB104674-90

Entry by cable, tube or trunking

Removable chassis
■ For table-top installation, as well as the possibility of adjustment for correct horizontal and vertical positioning (flush-mounted version)

Earth and neutral terminal block
■ Clipped with quick connection

Removable front face
■ With insulating screen
■ 5 colours available:
☐ white
☐ ivory
☐ garnet red
☐ pistachio green
☐ misty grey

Blanking plates

Base
■ With pre-holes on the 4 sides for entry tubes
■ Clamping leg for hollow partition
■ Carton protection for installation in masonry

Large space for cabling

A white opaque or transparent door
■ Reversible opens to 140°, after which it can be removed, without breaking

Options
■ Marker light: ensures that the electrical functions can be accessed in the event of a general power supply failure: the enclosure remains illuminated and can therefore easily be accessed to allow the electrical installation to be restored to normal operation
■ Phase terminal block
■ Kit IP 41
■ Keylock



PB104631-90

Mini Pragma

Flush mounting enclosures

Offer: with earth + neutral terminal block

A range of 18 mm, 1, 2 or 3-row 4, 6, 8, 12, 18, 24 or 36-module ready-to-use enclosures designed for electricians: ergonomic design and flexibility of installation.



PB104096-50

Function

This distribution or sub-distribution enclosure, up to 63 A, is designed for installing electrical switchboards in new or renovated installations in the housing sector.

Description

Two choices are possible:

Offer to compose

This offer can compose the enclosures according to their own preference, based on a choice of 5 colours of different front face and a large number of accessories.

OR

Offer composed

This offer allows having for a single reference a complete enclosure equipped with:

- a symmetrical back box
- robust
- depth adapted to the walls of reduced thickness
- with pre-holes for entry tubes on the 4 sides
- 1 to 3 rails DIN, chassis allows the cabling outside the back box
- a rigid and reversible white (RAL 9003) front face, fitted with pre-cutout blanking plates with white opaque or transparent door
- an earth and neutral terminal block

This enclosure can be equipped with a marker light, available in accessories. It allows locating the enclosure in the dark during a power failure.



PB104085-40

36-module enclosures



PB104083-29

24-module enclosures

PB104081-21



18-module enclosures

PB104079-22



12-module enclosures

PB104077-20



8-module enclosures

PB104071-40



6-module enclosures

PB104073-19




4-module enclosures



PB104108-20

Smoked transparent door.



PB104107-20

White door.

Technical data

Enclosures

Compliance with standards		IEC 60439-3, IEC 60529, IEC 60695-2-11, EN 50102, IEC 60670-24
Rated current (In)	4-module enclosure	50 A
	6 to 36-module enclosures	63 A
Rated insulation voltage (Ui)		< 400 V
Insulation		Class 2 (to IEC 60439-3)
Degree of protection	To IEC 60529	IP 40
	Against mechanical impacts	IK 07
Materials		Self-extinguishing technoplastic (1): resistant to fire and abnormal heat 650°C to IEC 60695-2-11

(1) Technoplastic material specially developed by Schneider Electric.

PB104087-35



MIP30104T

PB104088-35



MIP40104T

PB104089-35



MIP50104T

PB104090-35



MIP60104T

PB104091-35



MIP70104T

Offer to compose

Front face*			Cat. no.		+ Base
Number of rows	Number of modules per row	Capacity in 18 mm modules	With solid white door	With smoked transparent door	With earth + neutral terminal block
White					
1	4	4	MIP30104	MIP30104T	MIP82104
	6	6	MIP30106	MIP30106T	MIP82106
	8	8	MIP30108	MIP30108T	MIP82108
	12	12	MIP30112	MIP30112T	MIP82112
	18	18	MIP30118	MIP30118T	MIP82118
2	12	24	MIP30212	MIP30212T	MIP82212
3	12	36	MIP30312	MIP30312T	MIP82312
Ivory					
1	4	4	-	MIP40104T	MIP82104
	6	6	-	MIP40106T	MIP82106
	8	8	-	MIP40108T	MIP82108
	12	12	-	MIP40112T	MIP82112
	18	18	-	MIP40118T	MIP82118
2	12	24	-	MIP40212T	MIP82212
3	12	36	-	MIP40312T	MIP82312
Garnet red					
1	4	4	-	MIP50104T	MIP82104
	6	6	-	MIP50106T	MIP82106
	8	8	-	MIP50108T	MIP82108
	12	12	-	MIP50112T	MIP82112
	18	18	-	MIP50118T	MIP82118
2	12	24	-	MIP50212T	MIP82212
3	12	36	-	MIP50312T	MIP82312
Pistachio green					
1	4	4	-	MIP60104T	MIP82104
	6	6	-	MIP60106T	MIP82106
	8	8	-	MIP60108T	MIP82108
	12	12	-	MIP60112T	MIP82112
	18	18	-	MIP60118T	MIP82118
2	12	24	-	MIP60212T	MIP82212
3	12	36	-	MIP60312T	MIP82312
Misty grey					
1	4	4	-	MIP70104T	MIP82104
	6	6	-	MIP70106T	MIP82106
	8	8	-	MIP70108T	MIP82108
	12	12	-	MIP70112T	MIP82112
	18	18	-	MIP70118T	MIP82118
2	12	24	-	MIP70212T	MIP82212
3	12	36	-	MIP70312T	MIP82312

(*) Chassis and DIN rails delivered with the front face.

Mini Pragma

Flush mounting enclosures

Offer: with earth + neutral terminal block

PB104073-36



MIP20104T

Offer composed with earth and neutral terminal block

White enclosures				Cat. no.	
Number of rows	Number of modules per row	Capacity in 18 mm modules	Rated current In (A)	With solid white door	With smoked transparent door
1	4	4	50	MIP22104	MIP22104T
	6	6	63	MIP22106	MIP22106T
	8	8	63	MIP22108	MIP12108T
	12	12	63	MIP22112	MIP22112T
	18	18	63	MIP22118	MIP22118T
2	12	24	63	MIP22212	MIP22212T
3	12	36	63	MIP22312	MIP22312T

Components delivered with each enclosure

Type	
Identification strip for each row	To be glued onto the front panel
Two terminal block supports	
Two earth/neutral terminal blocks	Supplied with the 4 or 6-module enclosure 2 x (1 x 16 [□] + 2 x 10 [□] + 1 x 6 [□])
	Supplied with the 8 or 12-module enclosure 2 x (1 x 16 [□] + 4 x 10 [□] + 3 x 6 [□])
	Supplied with the 18 or 24-module enclosure 2 x (2 x 16 [□] + 8 x 10 [□] + 6 x 6 [□])
	Supplied with the 36-module enclosure 2 x (2 x 16 [□] + 9 x 10 [□] + 9 x 6 [□])
Blanking plates (packs of 10)	Clipped on the front face

PB104087-35



MIP30104T

PB104088-35



MIP40104T

PB104089-35




MIP50104T

PB104090-35



MIP60104T

PB104091-35



MIP70104T

Accessories

Front face *			Cat. no.	
Number of rows	Number of modules per row	Capacity in 18 mm modules	With solid white door	With smoked transparent door
White				
1	4	4	MIP30104	MIP30104T
	6	6	MIP30106	MIP30106T
	8	8	MIP30108	MIP30108T
	12	12	MIP30112	MIP30112T
	18	18	MIP30118	MIP30118T
2	12	24	MIP30212	MIP30212T
3	12	36	MIP30312	MIP30312T
Ivory				
1	4	4	-	MIP40104T
	6	6	-	MIP40106T
	8	8	-	MIP40108T
	12	12	-	MIP40112T
	18	18	-	MIP40118T
2	12	24	-	MIP40212T
3	12	36	-	MIP40312T
Garnet red				
1	4	4	-	MIP50104T
	6	6	-	MIP50106T
	8	8	-	MIP50108T
	12	12	-	MIP50112T
	18	18	-	MIP50118T
2	12	24	-	MIP50212T
3	12	36	-	MIP50312T
Pistachio green				
1	4	4	-	MIP60104T
	6	6	-	MIP60106T
	8	8	-	MIP60108T
	12	12	-	MIP60112T
	18	18	-	MIP60118T
2	12	24	-	MIP60212T
3	12	36	-	MIP60312T
Misty grey				
1	4	4	-	MIP70104T
	6	6	-	MIP70106T
	8	8	-	MIP70108T
	12	12	-	MIP70112T
	18	18	-	MIP70118T
2	12	24	-	MIP70212T
3	12	36	-	MIP70312T

(*) Chassis and DIN rails delivered with the front face.

Mini Pragma

Flush mounting enclosures

Offer: with earth + neutral terminal block

PB104104-35



MIP80104

PB104130-35



MIP81112

PB104131-35



MIP82112

PB104639-45



MIP99035

Accessories (continued)

Base only			Cat. no.
Number of rows	Number of modules per row	Capacity in 18 mm modules	
1	4	4	MIP80104
	6	6	MIP80106
	8	8	MIP80108
	12	12	MIP80112
	18	18	MIP80118
2	12	24	MIP80212
3	12	36	MIP80312

Base with earth terminal block			Cat. no.
Number of rows	Number of modules per row	Type of terminal block	
1	4	1 x 16 [□] + 2 x 10 [□] + 1 x 6 [□]	MIP81104
	6	1 x 16 [□] + 2 x 10 [□] + 1 x 6 [□]	MIP81106
	8	1 x 16 [□] + 4 x 10 [□] + 3 x 6 [□]	MIP81108
	12	1 x 16 [□] + 4 x 10 [□] + 3 x 6 [□]	MIP81112
	18	2 x 16 [□] + 8 x 10 [□] + 6 x 6 [□]	MIP81118
2	12	2 x 16 [□] + 8 x 10 [□] + 6 x 6 [□]	MIP81212
3	12	2 x 16 [□] + 9 x 10 [□] + 9 x 6 [□]	MIP81312

Base with earth/neutral terminal blocks			Cat. no.
Number of rows	Number of modules per row	Type of terminal block	
1	4	2 x (1 x 16 [□] + 2 x 10 [□] + 1 x 6 [□])	MIP82104
	6	2 x (1 x 16 [□] + 2 x 10 [□] + 1 x 6 [□])	MIP82106
	8	2 x (1 x 16 [□] + 4 x 10 [□] + 3 x 6 [□])	MIP82108
	12	2 x (1 x 16 [□] + 4 x 10 [□] + 3 x 6 [□])	MIP82112
	18	2 x (2 x 16 [□] + 8 x 10 [□] + 6 x 6 [□])	MIP82118
2	12	2 x (2 x 16 [□] + 8 x 10 [□] + 6 x 6 [□])	MIP82212
3	12	2 x (2 x 16 [□] + 9 x 10 [□] + 9 x 6 [□])	MIP82312

Other accessories



Type		Cat. no.
Flush mounting IP41 kit		MIP99035
Terminal block support (pack of 2)	18 modules	MIP99036
Terminal block	1 x 16 [□] + 2 x 10 [□] + 1 x 6 [□]	MIP99037
	1 x 16 [□] + 4 x 10 [□] + 3 x 6 [□]	MIP99038
	2 x 16 [□] + 8 x 10 [□] + 6 x 6 [□]	MIP99039
	2 x 16 [□] + 9 x 10 [□] + 9 x 6 [□]	MIP99040
Earth terminal block	3 x 16 [□] + 12 x 2.5 [□]	13409
	4 x 16 [□] + 20 x 2.5 [□]	13410
Ph+N insulated terminal block (pack of 2)	2 x (1 x 35 [□] + 5 x 16 [□])	13411
	2 x (1 x 35 [□] + 7 x 16 [□])	13412
Blanking plate	5 modules	13387
Symbol plate	Standard	13735
	Special	13736
Keylock		MIP99046
Hollow partition flush mounting kit		MIP99047
Marker light		MIP99050

Mini Pragma


Flush mounting enclosures

DB123283

Front view

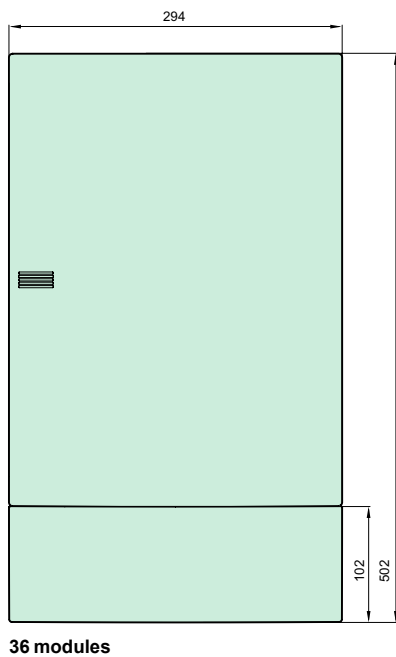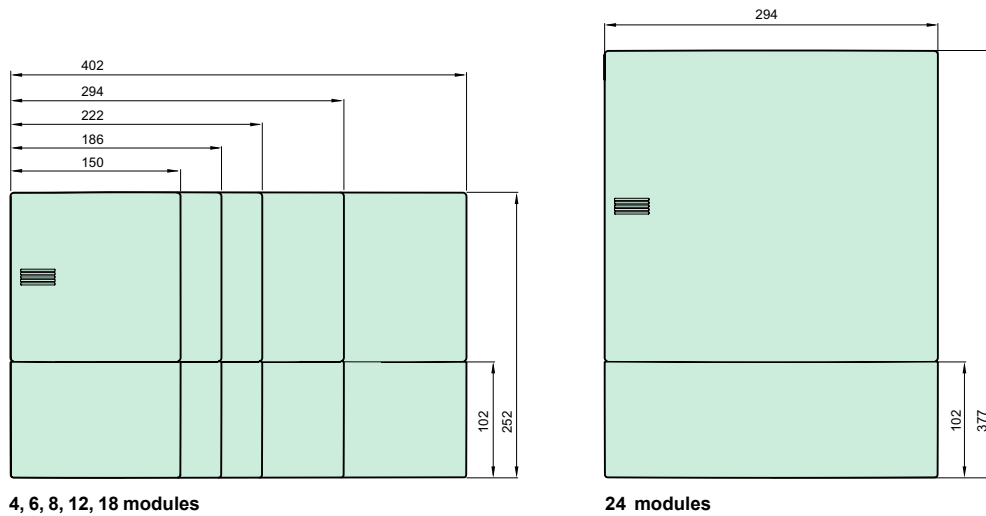

Side view

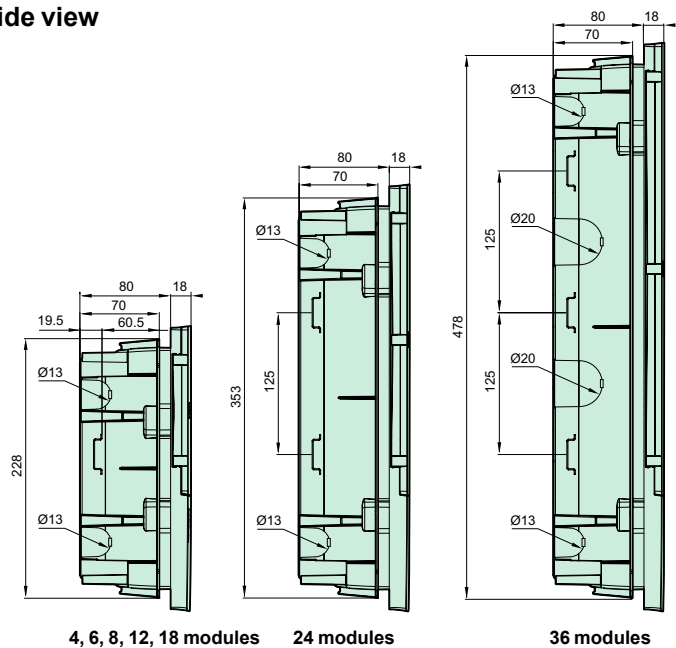

Top view

